



Curva 45° nº 1108.



Curva 90° nº 1109.

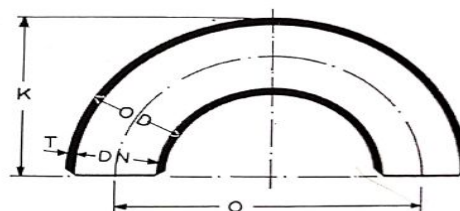

Curva 180° nº 1110.

CURVA RAIO LONGO AÇO CARBONO

PVV

FABRICANTE DE CONEXÕES AÇO CARBONO

(11) 4114-3610

Diâmetro Nominal DN	Diâmetro Externo OD	Espessura Parede T	SCH Nº	45°		90°		180°		
				Centro a Face B pol mm	Peso Aprox. Kg	Centro a Face A pol mm	Peso Aprox. Kg	Centro a Centro O pol.mm	Altura do Arco K pol.mm	Peso Aprox. Kg
1/2"	0.840 21.30	0.147 3.73	80	5/8. 15.87	0.05	1 1/2 38.10	0.089	3 76.2	1 7/8 47.62	0.204
3/4"	1,050 26.67	0.154 3.91	80	15/27. 11.91	0.05	1 1/8 28.6	0.10	2 1/4 57.2	1 11/16 42.9	0.21
1"	1,315 33.40	0.179 4.55	80	5/8. 15.9	0.1	1 1/2 38.1	0.20	3 76.2	2 3/16 55.6	0.4
1 1/4"	1,660 42.16	0.191 4.85	80	25/32. 19.84	0.18	1 7/8 47.6	0.35	3 3/4 95.2	2 3/4 69.8	0.7
1 1/2"	1,900 48.26	0.200 5.08	80	15/16. 23.83	0.25	2 1/4 57.2	0.51	4 1/2 114.3	3 1/4 82.6	1.02
2"	2,375 60.32	0.218 5.54	80	1 1/4. 31.8	0.47	3 76.2	0.94	6 152.4	4 3/16 106.4	1.88
2 1/2"	2,875 73.02	0.276 7.01	80	1 9/16. 39.76	0.9	3 3/4 95.2	1.79	7 1/2 190.5	5 3/16 131.8	3.58
3"	3,500 88.9	0.300 7.62	80	1 7/8. 47.6	1.44	4 1/2 114.3	2.87	9 228.6	6 1/4 158.8	5.76
3 1/2"	4,000 101.6	0.337 8.56	80	2 3/16. 55.6	2.05	5 1/4 133.4	4.1	10 1/2 266.7	7 1/4 184.2	8.21
4"	4,500 114.3	0.375 9.52	80	2 1/2. 63.5	2.81	6 152.4	5.62	12 304.8	8 1/4 209.6	11.2
5"	5,563 141	0.432 10.97	80	3 1/8. 79.4	4.85	7 1/2 190.5	9.71	15 381.0	10 5/16 261.9	19.4
6"	6,625 168	0.500 12.7	80	3 3/4 95.3	8.03	9 228.6	16.0	18 457.2	12 5/16 312.7	32.0
8"	8,625 219.1	0.500 12.7	80	5" 127	16.2	12 304.8	32.2	24 609.6	16 5/16 414.3	64.9
10"	10,750 273.0	0.500 12.7	60	6 1/4. 158.8	25.4	15 381	50.8	30 762.0	20 3/8 517.5	102
12"	12,750 323.8	0.500 12.7	-	7 1/2. 190.5	36.7	18 457.2	73.5	36 914.4	24 3/8 619.1	147
14"	14,000 355.6	0.500 12.7	-	8 3/4 222.2	47.2	21 533.4	94.3	42 1067	28 711.2	189
16"	16,000 406.4	0.500 12.7	40	10 254	62.1	24 609.6	124	48 1219	32 812.8	248
18"	18,000 457.2	0.500 12.7	-	1 1/4 285.8	78.9	27 685.8	157	54 1372	36 914.4	315
20"	20,000 508.0	0.500 12.7	30	12 1/2 317.50	97.1	30 762.0	194	60 1524	40 1016	388
22"	22,000 558.8	0.500 12.7	-	13 3/4 349.3	118	33 838.2	236	66 1676	44 1118	472
24"	24,000 609.6	0.500 12.7	0	15 381.0	141	36 914.4	282	72 1829	48 1219	564